


Product Submittal Sheet

L-Angle

1-1/2" x 1-1/4" Standard L-Angle

A standard 10'-0" long galvanized steel product, which is often field cut to job site conditions for the ultimate use as a connector for framing members. On interior framing it is often used to secure drywall at corner intersections or along horizontal planes.

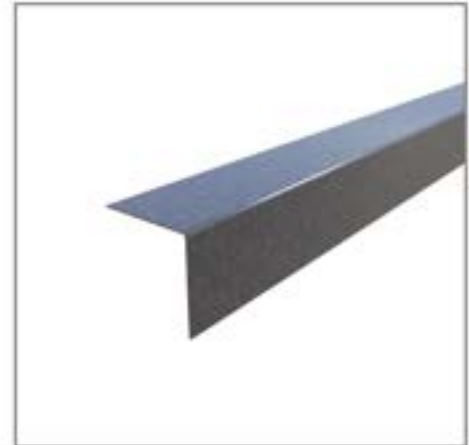

Product Data & Ordering Information

MATERIALS	All non-structural material: Grade 33ksi min. yield strength 18mils (25ga), 0.0188" Design Thickness, 0.0179" Min. Thickness 30mils (20ga DW), 0.0312" Design Thickness, 0.0296" Min. Thickness
COATING	G40EQ (G40 or G60 available)
MATERIALS	All Structural Material: Grade 33ksi min. yield strength 33mils (20ga STR), 0.0346" Design Thickness, 0.0329" Min. Thickness 43mils (18ga), 0.0451" Design Thickness, 0.0428" Min. Thickness 54mils (16ga), 0.0566" Design Thickness, 0.0538" Min. Thickness 68mils (14ga), 0.0713" Design Thickness, 0.0677" Min. Thickness
COATING	G40EQ (G40 or G60 available)
DIMENSIONS	1-1/2" leg x 1-1/4" leg angle
STOCK LENGTH	10'-0" long (Custom lengths available by special order)

Code Approvals & Performance Standards

CSSBI 61:21 NORTH AMERICAN STANDARD FOR COLD-FORMED STEEL FRAMING - NON STRUCTURAL MEMBERS

- Section A4 Material - Chemical & mechanical requirements (Referencing ASTM A1003 / A1003M)
- Section A5 Corrosion Protection (Referencing ASTM A653/A653M)
- Section C Installation - (Referencing ASTM C754)