


Product Submittal Sheet

Product Category: S125(1-5/8" Flange Structural Stud)
Product Type: 362S125-17/27/33 P - Punched
 33mils (20ga) 43mils (18ga) 54mils (16ga)
 68mils (14 ga)

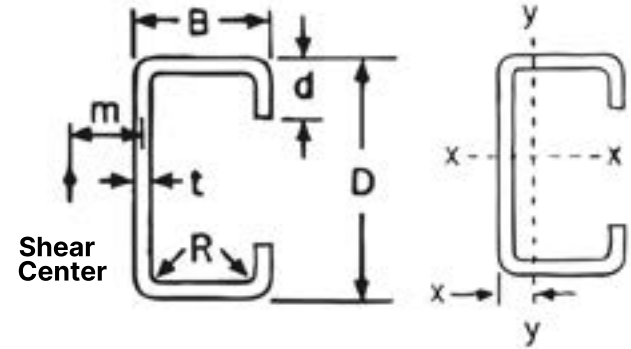

1,25 Equal Flange Stud

ID	D (in)	B (in)	d (in)	t (in)	R (in)	A (in ²)	Weight (lb/ft)	Properties of Full Section																
								Axis X - X			Axis Y - Y			I _x (in ⁴)	I _y (in ⁴)	r _x (in)	r _y (in)	J (in ⁴)	C _x (in ³)	C _y (in ³)	J (in ⁴)	r _x (in)	r _y (in)	x _c (in)
								I _x (in ⁴)	S _x (in ³)	r _x (in)	I _y (in ⁴)	S _y (in ³)	r _y (in)											
362S125-33	3,625	1,25	0,250	0,0346	0,075	0,219	0,75	0,43	0,24	1,40	0,040	0,044	0,429	0,325	0,505	0,000087	0,11	2,05	1,68	-0,808				
362S125-27	3,625	1,25	0,250	0,0283	0,075	0,180	0,62	0,36	0,20	1,41	0,034	0,036	0,433	0,325	0,509	0,000048	0,09	2,05	1,68	-0,815				
362S125-17	3,625	1,25	0,250	0,0188	0,075	0,121	0,41	0,24	0,13	1,41	0,023	0,025	0,437	0,325	0,515	0,000014	0,06	2,06	1,69	-0,826				

Code Approvals & Performance Standards

CSSBI 61:21 NORTH AMERICAN STANDARD FOR COLD-FORMED STEEL FRAMING - NON STRUCTURAL MEMBERS

- Section A4 Material - Chemical & mechanical requirements (Referencing ASTM A1003 / A1003M)
- Section A5 Corrosion Protection (Referencing ASTM A653/A653M)
- Section C Installation - (Referencing ASTM C754)